



**SUMMIT**  
wireless

Summit Wireless Technology  
*"Superior Surround Made Simple"*

# **Methods and Implementations: *Robust, Wireless Digital Audio Delivery***

---

Summit Semiconductor, LLC

February 10<sup>th</sup>, 2011

This paper describes the methods used by Summit Semiconductor's Summit Technology to provide high quality wireless surround audio without experiencing the interference, static, or dropouts common to other wireless audio solutions.

---

## Disclaimer

The information contained in this document is the proprietary and exclusive property of Summit Semiconductor, LLC except as otherwise indicated. No part of this document, in whole or in part, may be reproduced, stored, transmitted, or used for design purposes without the prior written permission of Summit Semiconductor, LLC.

The information contained in this document is subject to change without notice.

The information in this document is provided for informational purposes only. Summit Semiconductor, LLC specifically disclaims all warranties, express or limited, including, but not limited, to the implied warranties of merchantability and fitness for a particular purpose.

---

# Table of Contents

Overview .....	4
Technical Challenge.....	5
Robustness Methods .....	6
Summary.....	10
Contact Us .....	11

## Overview

Summit Wireless Technology is a robust wireless audio solution designed specifically for Home Theater audio applications. Summit was designed to solve Home Theater audio setup and distribution difficulties by delivering innovative features and capabilities in three key areas:

- **High Quality Audio:** Extracts the highest audio fidelity possible from the speaker drivers and cabinets through programmable filters and crossovers tuneable to each speaker's characteristics.
- **Ease of Setup:** Automatic Home Theater audio setup and single button sweet spot location programming.
- **Robust wireless network:** Provides a noise free, interference resistant wireless network between the master and up to eight speakers, with 5 ms latency.

This White paper focuses on the Summit Wireless Technology techniques and technology to enable the **Robust Wireless Network**. Please see the complete set of White papers on the Summit Wireless Technology Audio IC solution.

## Technical Challenge

A key challenge for wireless Home Theater audio solutions is to provide sufficient resilience (robustness) to lost audio information caused by:

- Interference from other RF sources in the house
- Multi-path distortions
- Disruptions to the RF signal from people or objects moving within the room

Competitive wireless audio solutions address the wireless robustness through a variety of techniques, but typically the added resiliency is provided at the cost of audio fidelity and latency. Some of the techniques commonly used by competitors include:

Competitive Solutions	Summit Wireless Technology
Use the 2.4 GHz Wireless Spectrum that competes with many common devices including wi-fi access points, Bluetooth, microwave ovens, and cordless phones.	Uses the newly opened 5 GHz U-NII band spectrum, which is relatively free of congestion. 21 non-overlapping channels available.
Reduce data by compressing the audio or reducing to 16-bit data samples	Supports 24-bit, uncompressed audio resulting in no loss of fidelity for DVD or other high quality audio content.
Resend lost data at the expense of end-to-end latency, noticeable lip-synch issues and provide an unsatisfactory gaming experience.	Forward Error Correction (FEC) and other techniques mitigate the need for resending lost data. Low 5 ms end-to-end latency produces no discernible lip synch issues, and supports gaming use.
Continually transmit at the highest permitted power level, which can interfere with the operation of other devices using the same spectrum.	Provides power agility to transmit at the lowest possible power level and be a “good citizen” to neighbouring devices.

# Robustness Methods

Summit Wireless Technology provides a high quality wireless data infrastructure for a Home Theater system by ensuring that audio data is transmitted to speakers with no discernible audio artifacts introduced through interference, or disruptions to the wireless link from movement of people and objects.

Summit Semiconductor has designed the Summit Wireless Technology with eight overlapping levels of link protection to ensure that the audio played at each speaker enables consumers to experience the richness of surround sound audio.

All eight levels are always available and enabled. There is no delay for buffering or re-transmission. The transport has a fixed latency of 5 ms when using some or all of robustness techniques listed in Figure 1.

Level	Robustness Method
1	Reduce interference -- <i>U-NII Band Spectrum</i>
2	Reduce multi-path distortion – <i>OFDM Modulation</i>
3	Minimize lost data – <i>Forward Error Correction</i>
4	Optimal RF reception – <i>Antenna Diversity</i>
5	Avoid congested frequencies – <i>Dynamic Frequency Selection (DFS)</i>
6	Avoid interfering with other systems – <i>Transmit Power Control (TPC)</i>
7	Error recovery – <i>Audio specific encoding &amp; interpolation</i>
8	Fail safe – <i>Active muting</i>

**Figure 1: Eight Levels of Robustness**

## Level 1: U-NII band

The easiest way to avoid interference is to operate in an area of the RF spectrum that is less congested with other interferers common in the home environment. The U-NII band, which extends from 5.1 GHz to 5.7 GHz, is largely unused compared to the 2.4 GHz space that is filled with Wi-Fi devices and microwave interference. The U-NII band also avoids the interference from cordless phones and other unlicensed transmitters in the crowded 5.8 GHz space. The U-NII band is supported worldwide, making it possible to ship a hardware solution anywhere in the world. FW loads may be different to support the different U-NII regulations of different countries. The U-NII band supports up to 21 non-overlapping channels (country dependent), allowing the system a lot of flexibility in choosing free space. U-NII band rules are strict; requiring devices to monitor channels and move if another device is transmitting on a channel, thus further reducing the chance of interference.

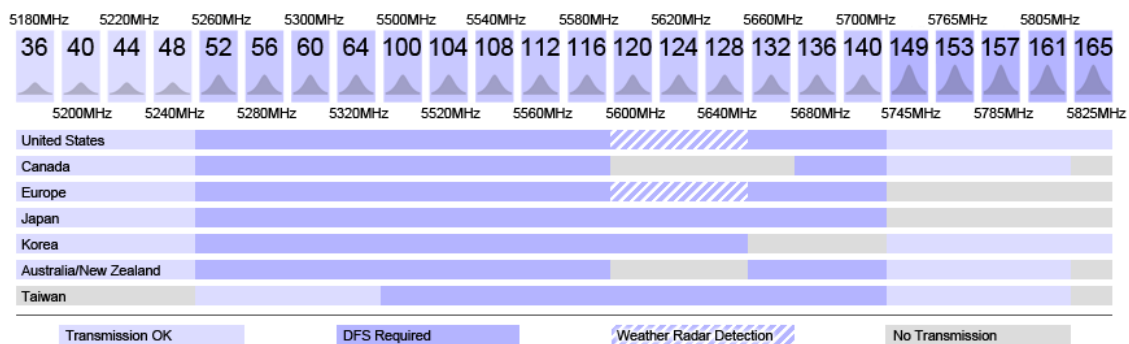


Figure 2: U-NII Frequency Spectrum

## Level 2: OFDM Modulation

The baseband processor uses Orthogonal Frequency Division Multiplexing (OFDM) modulation with Viterbi and Reed-Solomon encoding.

OFDM is a spread spectrum technique that distributes data over a large number of carriers spaced apart at precise frequencies. This

frequency spacing prevents the demodulators from seeing frequencies other than their own. Other benefits of OFDM include high spectral efficiency, resiliency to RF interference, and lower multi-path distortion.

### ***Level 3: Forward Error Correction:***

The Summit Wireless Technology Media Access Controller (MAC) incorporates proprietary Forward Error Correction (FEC) algorithms based on Viterbi and Reed Solomon techniques and optimized by Summit Semiconductor. Eight bits of forward error correction data added to each 24-bit audio sample to help facilitate the recovery of any data lost in transmission. With FEC, re-transmission of lost data and its impact on latency and A/V lip-synch are avoided.

### ***Level 4: Antenna Diversity***

Diversity of up to four antennas is provided for each speaker or master. The redundancy greatly reduces the likelihood of nodes, shadows or weak spots, allowing the speaker to be placed anywhere in the room. The system constantly monitors antenna signal strength and can immediately switch between antennas on a per-packet basis to adapt to changing conditions.

### ***Level 5: Dynamic Frequency Selection (DFS)***

The MAC is designed to hop frequencies on a per-packet basis. The master continually scans all other channels to identify traffic patterns and behaviours on an out-of-band process that doesn't interfere with audio transmission. In the event that interference is detected on the current channel, the Summit solution has already predetermined the next available free channel.

## ***Level 6: Transmit Power Control (TPC)***

Summit Wireless Technology dynamically adapts power transmission based on two-way communication with each of the speakers in the room to ensure that the transmission power is “just enough” to reach all the speakers in the room. Changes in the signal strength from disruptions such as people moving around the room are immediately detected and managed. Use of the lowest transmitted power possible facilitates multiple Summit Wireless systems to operate in adjacent rooms, even in dense settings like hotels and apartments.

## ***Level 7: Audio specific encoding & interpolation***

The audio is encoded in a proprietary manner that greatly enhances the performance of the Summit audio interpolator. Each speaker supports up to 10 ms of audio interpolation such that a catastrophic loss of a packet data is not detected by anything other than sophisticated audio test equipment.

## ***Level 8: Muting***

In the event that more than 10 ms of packet data is lost, the speaker fades the volume of the audio interpolation, described previously, to zero until the link is restored, at which point the speaker volume is faded back up to the calibrated level. This muting of individual speaker is a final measure of protection in the case of data loss, and is similar to the protocol used by CDs and DVDs to handle scratches and nicks on a disc. In everyday listening, consumers do not realize that they are integrating the silence produced by CDs and other devices during this muting period. The adoption of this methodology ensures that there are no abrupt snaps, pops, or static heard from any Summit Wireless Technology speaker.

## Summary

Summit Wireless Technology enables a premium audio solution designed specifically for Home Theater audio systems. It provides an auditory experience exceeding that of comparable wired systems. One key component of the auditory experience is the requirement for the unaltered audio data to reach the speakers with reliability and robustness of a wired system.

Summit Semiconductor has achieved this requirement with multiple levels of robustness and redundancy designed into the solution to ensure the source audio content is reliably transmitted to each of the speakers through techniques that do not alter or minimize the quality of the source material.

Summit Wireless Technology offers up an experience that needs to be heard to be fully appreciated.

**Summit Wireless Technology**  
***“Superior Surround Made Simple”***

## Contact Us

Summit Semiconductor, LLC

Address: 22867 NW Bennett Street, Suite 200

Hillsboro, Oregon

97124

USA

Email: [info@summitsemi.com](mailto:info@summitsemi.com)

Website: [www.summitwireless.com](http://www.summitwireless.com)

Tel: 503-615-7700

Fax: 503-615-4232

Copyright ©2011 Summit Semiconductor, LLC. All Rights Reserved.

Summit Wireless Technology logos and trademarks are trademarks of Summit Semiconductor, LLC or its subsidiaries in the United States and other countries.

Other names and brands may be claimed as the property of others. Information regarding third party products is provided solely for educational purposes. Summit Semiconductor LLC is not responsible for the performance or support of third party products and does not make any representations or warranties whatsoever regarding quality, reliability, functionality, or compatibility of these devices or products.